


Filter Bag

HI-EFFICIENCY BI-DIRECTIONAL FLOW FILTER BAGS

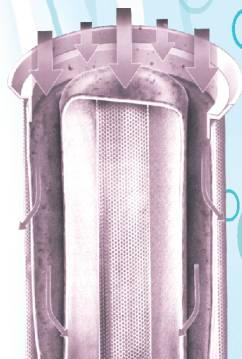

I. Bi - Directional Flow

PRODUCT CATEGORIES

- FCIPHD - Polypropylene Bags, Bi-directional Flow
- FCIEHD - Polyester Bags, Bi-directional Flow

Our Hi-efficiency Bi-directional Flow bags feature 85% more filter surface area, dual directional flow, and improved flow rates.


This line of products consist of an outer bag and an inner bag. The total filter surface area increased by 85% comparing to conventional single profile bags. During operation, both bags participate in filtration simultaneously, so that flow rate can be easily doubled. Refer to I Illustration I.

Dual flow bag is not new in filtration industry. What differentiates ours from competitors' is our innovative REMOVALBE inner strainer basket design. Refer to Illustration II.

In conventional design of strainer basket for dual-flow bags, the inner basket is welded inside outer basket, not only it requires customers to invest in specialized baskets, but also it makes the installation of filter bags a demanding task.

Our innovative design allows customers to utilize their existing standard baskets. The inner basket is REMOVALBE and NOT welded inside the outer basket. To install a Bi-Directional bag, all operators need to do is to insert the removal inner basket into the Bi-Directional bag, hang two tie-knobs located on the bag bottom onto inner basket handles, and install the assembled bag into the outer basket.

Because the bottom of the bag is tied onto the inner basket, not only the operator can easily install the bag, but also such design successfully prevent bag twisting caused but liquid back flush. Refer to Illustration II.

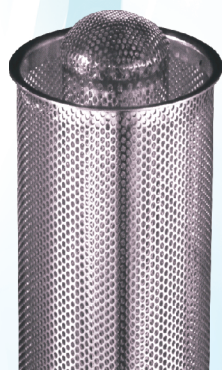

II. Removable Inner Basket

FEATURES

- FDA compliant none-woven felt. 100% free of silicon contamination
- Single & multiple layer depth media composites
- 1 ~ 200 micron range, nominal rating
- Patented SDS & STS pressure seal rings, steel snap-fit rings
- Broad chemical compatibilities
- Fiber migration & extractable free media treatment
- Large contaminant retention capacities, extended service lives
- Change-out pressure differential 0.10 MPa, Max. 0.16 MPa

TYPICAL APPLICATIONS

- Auto coating & paint
- Water purification & processing
- Pharmaceutical
- Food & beverage
- Bulk & fine chemicals
- Electronics



III. Bag Bottom Tie Knobs

TECHNICAL SPECIFICATIONS

Filter Size	Media Availability	Media Category	Seam Treatment	Length (mm)	Diameter (mm)	Filter Area (m ²)	Volume (Liter)	Housing Used
Size 1	PP, PE	Non-Woven	Welded/Stitched	420	180	0.25	8.0	FCISBF-M-717S1/S2/S3
Size 2	PP, PE	Non-Woven	Welded/Stitched	820	180	0.50	17.5	FCISBF-M-732S1/S2/S3

Filter Concept Inc.,

(An ISO 9001 : 2000 Certified Company)

Corporate Office : 302, 'AALIN' Opp. Gujarat Vidhyapith, B/h. Jet Airways Office, Nr. Ajanta Commercial Center, Ashram Road, Ahmedabad - 380 014, Gujarat, India

Unit : A-6, Pushparaj Estate, B/h. City Gold Theatre, Anil Starch Roadm Saraspur, Ahmedabad-380 018, Gujarat, India.

Ph. No. +91 79 27540069, 27541602, 27540592, 32918518 Fax : + 91 79 27540801

Email : info@filter-concept.com Website : www.filter-concept.com